

HEOS II 40L

FIXED LED DOWNLIGHT • L-SERIES

40W

DESCRIPTION


Trim: Die-cast Aluminium (white standard)
Body: Die-cast Aluminium (white standard)
Safety Cover: Clear PC
Reflector: Aluminium
Weight: 1.6kg
Cutout: Ø200 - 210mm

FEATURES

- 5-year Electrical System Warranty
- High Colour Consistency (MacAdam 3 SDCM)
- Future-proof: Interchangeable LED Modules (Zhaga) — www.zhagastandard.org
- Passive Cooling
- Dimmable¹
- CRI >80 and CRI >90
- Also available in 2700K and 5000K



IP
40



ORDERING CODE ²	DESCRIPTION	POWER WATTAGE	LUMEN OUTPUT	
			CRI>80	CRI>90
111102-XX-YY	HEOS 40L FIXED LED DOWNLIGHT 3000K WIDE	40	4322	3467
111105-XX-YY	HEOS 40L FIXED LED DOWNLIGHT 4000K WIDE	40	4380	-

¹ Phase-dimming - please contact your local representative for further information.

² Ordering codes:

XX = CRI (refer to table)

YY = Control Options (ND = Non-Dim, PD = Phase Dim, DA = DALI, DMX = DMX512)


Z = LED module (BL = Bridgelux)

Specifications subject to change without notice. Updated Jan 2017.

PHOTOMETRICS

CRI>80

60° 3000K

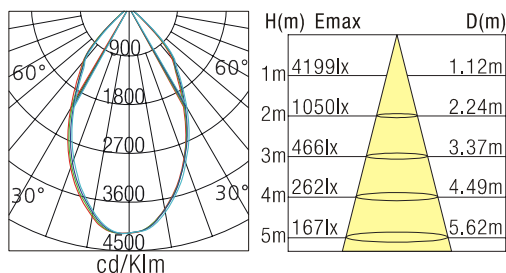

CRI>90

60° 3000K

