




Thintube 1000

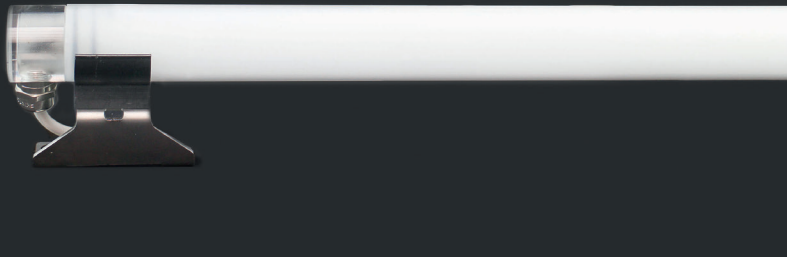

Dimensions (mm)

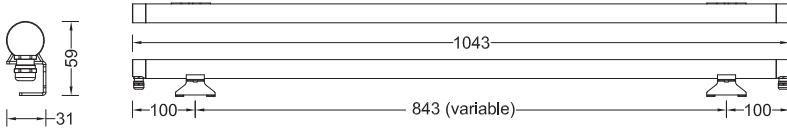

Photometric curve



Thintube1000 - NW_OD

Technical specification

- Source: Mid power LED
- LED Count: 60
- LED life time: >50,000 hrs (L70 B50)
- Source flux: 1150 lm (NW)
- Luminaire efficiency: 54 lm/W (NW_OD)
- Input power: 17W
- Supply voltage: 24 VDC
- Driver: Remote
- Insulation class: III
- Colour: White (3000K to 6000K)
- Emission: 120° diffusing cover
- Working position: Any
- Fixation: 2 brackets with 2 holes Ø4.5mm
- IP rating: IP65
- Storage: -50°C to +80°C
- Control: No control (On/Off)
- Connection: 2 free end cables (In/Out), 0.8m length
- Construction: Sandblasted metacrylate UV resistant body, hermetic sealing by EPDM gaskets, stainless steel brackets
- Weight: 0.5 kg

Code table

product	size	finishing	control	voltage	color	optics
THB	10	TP	R	024	WW	OD
THB= Thintube	10= 1000mm	TP= Metacrylate	R= Regulator	024= 24VDC	WW= 3000 K NW = 4000 K CW = 6000 K	OD= Opal diffuser

Specification are subject to change without notice.
rev . datasheet thintube 1000 1015EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer