



Walled



Dimensions (mm)

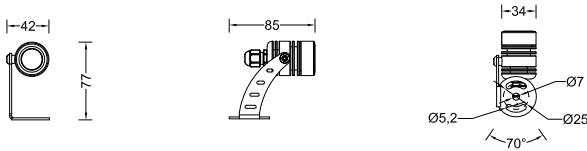

Photometric curve

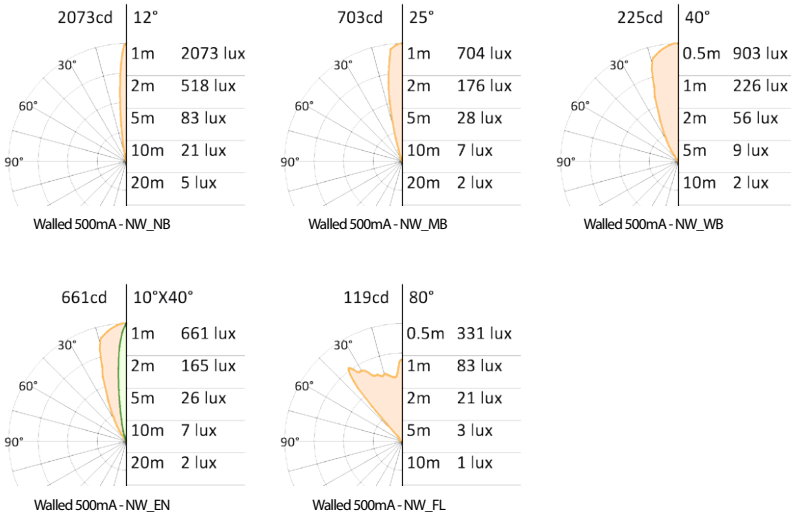

Technical specification

Source:
High power LED
LED Count:
1
LED life time:
>50,000 hrs (L70 B50)
Source flux:
165 lm (NW)
Luminaire efficiency:
69 lm/W (NW_NB)
Input power:
1.8W
Supply current:
500 mA
Driver:
Remote
Insulation class:
III
Colour:
White (2200 K to 6000 K), Red, Green, Blue, Amber
Emission :
PMMA precision optics 12°, 25°, 40°, 10° x 40°, reflector 80°
Working position:
Any
Fixation:
2 elongated Ø5.2 mm holes and 1 Ø7.0 mm hole
IP rating:
IP65 and IP67
IK rating:
IK 08
Storage:
-50°C to +80°C
Connection:
Free end cable, 0.8 m length
Construction:
Anodised aluminum body and bracket, tempered front glass, hermetic sealing by silicone gaskets, stainless steel screws
Weight:
0.12 kg

Code table

product	size	finishing	control	voltage	color	optics
WAL	01	AN	S	000	SW	NB
WAL= Walled	01= 1 LEDs	AN= Anodised Aluminium	S= Separated	000= Constant current	SW= 2200 K WW= 3000 K NW= 4000 K CW= 6000 K MR= Red MG= Green MB= Blue MA= Amber	NB= Narrow beam MB= Medium beam WB= Wide beam EN= Elliptical narrow FL= Flood optics

Specification are subject to change without notice.
rev . datasheet walled_02 0616EN

Space Cannon Australia Pty Ltd
1/169 Beavers Road | Northcote | Vic | 3070
T (+61 3) 9486 5366 | sales@spacecannon.com.au
www.spacecannon.com.au

Authorised Dealer