



Glowline 300



Dimensions (mm)

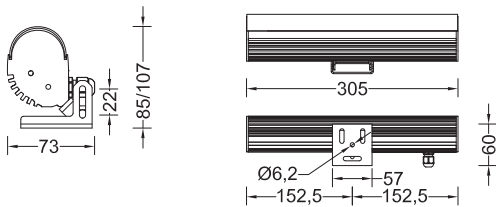

Photometric curve

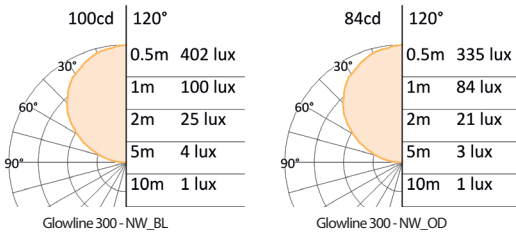

Technical specification

Source:
 Mid power LED
LED Count:
 18
LED life time:
 >50,000 hrs (L70 B50)
Source flux:
 710 lm (NW)
Luminaire efficiency:
 92.5 lm/W (NW_BL)
Input power:
 7W
Supply voltage:
 230V 50/60Hz
Driver:
 Integrated
Insulation class:
 I
Protections:
 Short circuit, overload, over voltage and thermal protection
Colour:
 White (3000K to 6000K)
Emission:
 Diffusing cover 120° or opal
Working position:
 Any
Fixation:
 1 bracket with 3 elongated holes Ø6.2 mm and 1 hole Ø6.2 mm
IP rating:
 IP65 and IP67
IK rating:
 IK 08
Storage:
 -50°C to +80°C
Connection:
 Free end cable, 0.8m length
Construction:
 Anodised extruded aluminium body, AISI 316 stainless steel brackets, pressure compensation valve, UV-stable polycarbonate cover, hermetic sealing by silicone sealing, stainless steel screws
Weight:
 1.0 kg

Tabella codice

product	size	finishing	control	voltage	color	optics
GLL	03	AN	X	230	WW	BL
GLL= Glowline	03= 300mm	AN= Anodised Aluminium	X= Without DMX	230= 230V 50/60 Hz	WW= 3000 K NW= 4000 K CW= 6000 K	BL= Bare LED OD= Opal diffuser

Specification are subject to change without notice.
 rev . datasheet Glowline 300 1015EN

Space Cannon Australia Pty Ltd
 1/169 Beavers Road | Northcote | Vic | 3070
 T (+61 3) 9486 5366 | sales@spacecannon.com.au
 www.spacecannon.com.au

Authorised Dealer